

MIN. 2' BLOCK OUT FROM EDGE OF WELL PIPE, MAX DEPTH OF BLOCK OUT SHALL BE A THIRD THE THICKNESS OF SLAB


WELL CAP

ZIP TIE

E.ROLL 30 MILS

REINFORCEMENT DETAIL
E.ROLL 30 MILS O/ E.POLY
O/ E.ROLL 30 MILS

E.STOP B

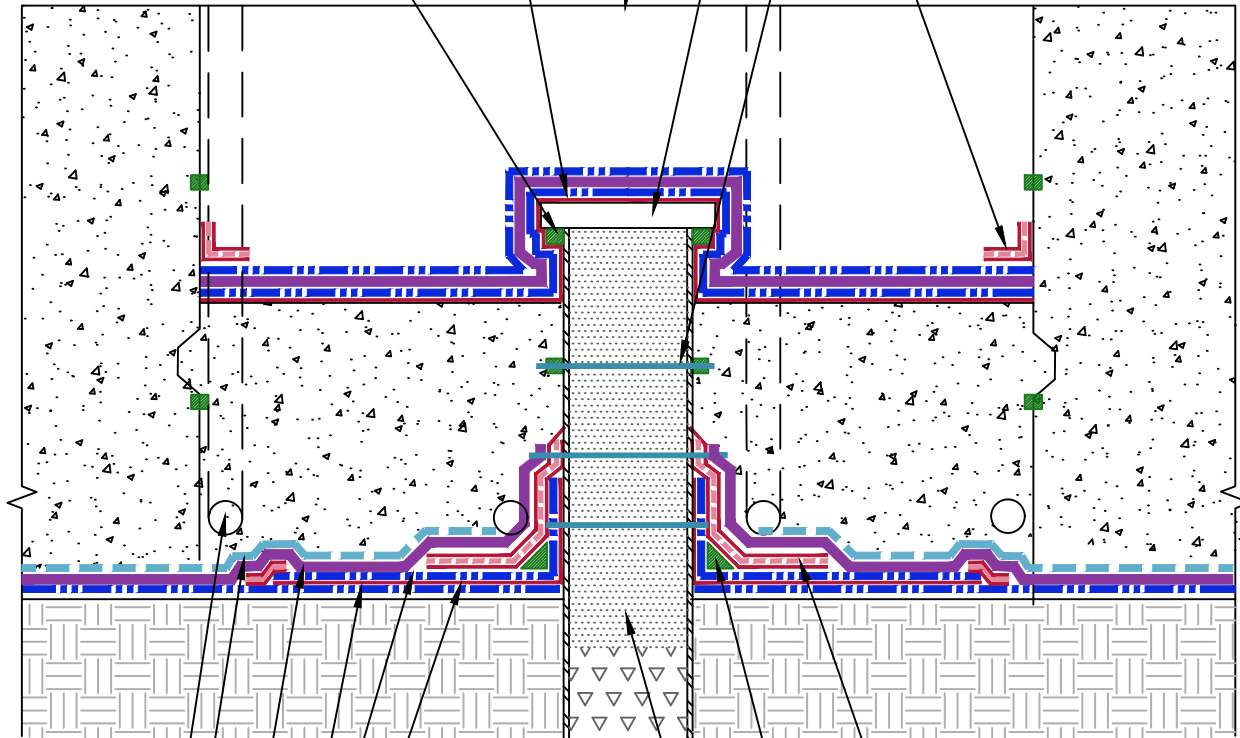

EPRO
INJECTION
TUBE

E.SHIELD 205B

E.SPRAY 80 MILS

E.BASE 205

E.ROLL 30 MILS

WELL PIPE

REINFORCEMENT DETAIL
E.ROLL 30 MILS O/ E.POLY
O/ E.ROLL 30 MILS

E.STOP B

EXTEND NON SHRINK GROUT OR
CLOSED CELL POLYURETHANE
FOAM FROM TOP OF WELL TO 12"
BELOW THE UNDERSLAB SYSTEM

BENTONITE SLURRY, PER
BUILDING CODE



SYSTEM

E.PROTECT

NOT
TO
SCALE

UNDERSLAB PENETRATION
DEWATERING WELL

OLD REFERENCE

TRADEMARKS OF EPRO
PRODUCTS ARE
REGISTERED IN CANADA

AS A SUPPLIER OF FINISHED PRODUCTS ONLY, EPRO SERVICES, INC. DOES NOT ASSUME RESPONSIBILITY FOR ERRORS IN DESIGN, ENGINEERING OR DIMENSIONS. THE PROJECT TEAM MUST VERIFY ALL DIMENSIONS AND SUITABILITY OF DETAILS. THE PRODUCTS LISTED ARE TRADEMARKS OF EPRO SERVICES, INC.

REVISIONS

ISSUED DATE

DRAWING NO.

1.24.18

2.125.1