




e.poly f

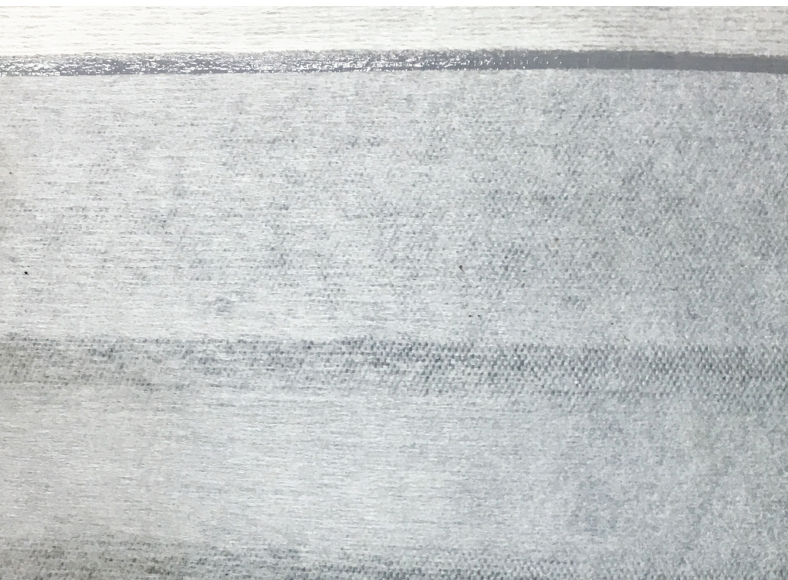

Product Description

Basic Use: e.poly f is designed for use with EPRO fluid applied membranes when detailing substrate joints and transitions where extreme friction and movement is anticipated.

Composition: e.poly f is made of a TPE coated, high strength, non-woven polyester.

Benefits

- Excellent conformability and elongation
- Exceptional tear resistance and high tensile strength
- Open weave allows complete saturation and integration

Limitations

- Not suitable for expansion joints or areas where movement is desired

Technical Data

Properties: See physical properties table

Coverages: 98 lineal feet

Specification Writer: Contact EPRO before writing specifications on this product. E.Series system assemblies should be reviewed in order to meet project specific site conditions.

Installation

Preparation: Please refer to manufacturer's specifications for substrate requirements. Application of e.poly f should be done when weather conditions meet the requirement of e.roll or e.spray.

Installation: Please refer to manufacturer's specifications. Install specified thickness of e.roll or e.spray and immediately embed e.poly f into the initial layer of e.roll or e.spray. Once firmly pressed into the uncured membrane, fully saturate with additional layer of e.roll or e.spray to the specified thickness.

Availability and Packaging

Contact EPRO sales representative for local distributors or authorized applicators (www.eproinc.com).

Roll: 9.4" x 98'

Warranty

Limited Warranty: EPRO Services, Inc. believes to the best of its knowledge that performance tables are accurate and reliable. EPRO warrants this product to be free from defects. EPRO makes no other warranties with respect to this product, express or implied, including without limitation the implied warranties of MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. EPRO's liability shall be limited in all events to supplying sufficient product to retreat the specific areas to which defective product has been applied. EPRO shall have no other liability, including liability for incidental or resultant damages, whether due to breach of warranty or negligence. This warranty may not be modified or extended by representatives of EPRO or its distributors.

Equipment

No special equipment is needed.

Technical Services and Information

Complete technical services and information are available by contacting EPRO at 800.882.1896 or www.eproinc.com.

This product was formally known as Polyester-F.



e.poly f

Typical Physical Properties

Physical Property	Value
Burst Pressure	57 lb./inch ²
Elastic Lateral Until Break	136%
Water Pressure Resistnace.....	>/= 21.75 lb./inch
Peel Resistance	113.4 oz./inch
Temperature Resistance	-11°F to +194°F
UV Resistance	Resistant

Dimensions: 9.4" x 98'

