




e.vent

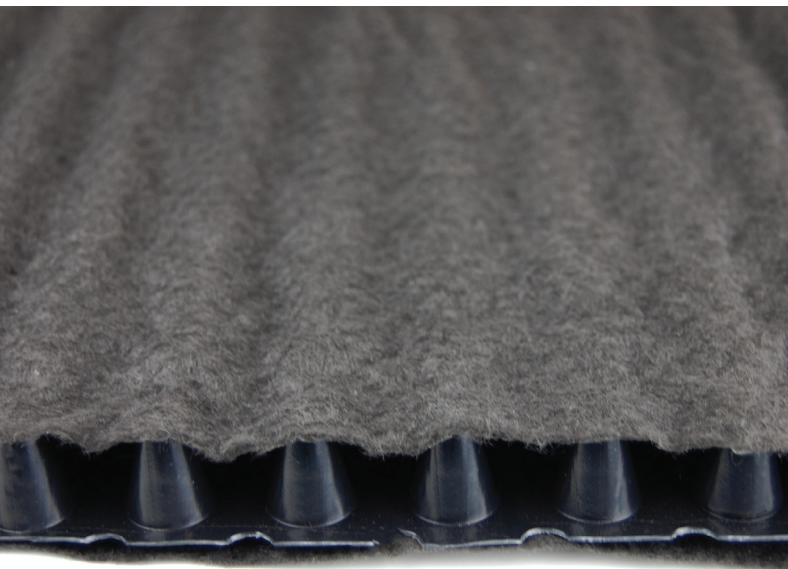

Product Description

Basic Use: e.vent is a composite low profile pressure relief and collection system designed to mitigate the build up of methane gas and contaminated vapor under an overlying structure. e.vent is most commonly designed to operate passively, but may also be designed as an active system when conditions require.

Composition: e.vent features a lightweight, three-dimensional, highly flexible polypropylene core and a non-woven geotextile filter fabric. The filter fabric is bonded to the polypropylene core to prevent fine substrates, such as sand, from clogging the vent pipe.

Benefits

- Cost effective alternative to traditional trenched PVC or ADS pipe systems
- Placed directly below the barrier system to drastically reduce vapor accumulation under the structure
- Can operate as a passive system with the ability to activate in the future

Limitations

- Not effective when constantly submerged
- Should be placed within a permeable substrates

Technical Data

Properties: See physical properties table

Coverages: One roll covers 165 lineal feet. Radius of influence is 25', maximum spacing between e.vent runs is 50'. Vent riser locations should be identified by an environmental engineer prior to installation.

Specification Writer: Contact EPRO before writing specifications on this product. E.Series system assemblies should be reviewed in order to meet project specific site conditions.

Installation

Preparation: Please refer to manufacturer's specifications for substrate requirements. Rolls should be inspected for cosmetic damage prior to application. Substrate must be compacted and inspected prior to installation, to make certain it is in accordance with manufacturer's requirements.

Application: Please refer to manufacturer's specifications. Installation of e.vent shall occur after the preparation of substrate and prior to the placement of the barrier system. e.endout shall be used in transition to vertical vent risers as required.

Availability and Packaging

Contact EPRO sales representative for local distributors or authorized applicators (www.eproinc.com).

Roll: 165'x 12" x 1", 65 lbs.

Warranty

Limited Warranty: EPRO Services, Inc. believes to the best of its knowledge that performance tables are accurate and reliable. EPRO warrants this product to be free from defects. EPRO makes no other warranties with respect to this product, express or implied, including without limitation the implied warranties of MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. EPRO's liability shall be limited in all events to supplying sufficient product to retreat the specific areas to which defective product has been applied. EPRO shall have no other liability, including liability for incidental or resultant damages, whether due to breach of warranty or negligence. This warranty may not be modified or extended by representatives of EPRO or its distributors.

Equipment

No special equipment is required.

Technical Services and Information

Complete technical services and information are available by contacting EPRO at 800.882.1896 or www.eproinc.com.

This product was formally known as Ecovent.



e.vent

Typical Physical Properties

Physical Property	Test Method	Value
Dimpled Core		
Core Material		Polypropylene
Color		Black
Compressive strength	ASTM D 1621.....	9,500 PSF (455 kN/m ²)
Thickness	ASTM - 1777	1 in.
Flow rate.....	ASTM D 4716.....	30 gpm./ft. of width

Filter Fabric

CBR puncture	ASTM D 6241.....	250 lbs.
Grab tensile strength.....	ASTM D 4632.....	100 lbs
AOS	ASTM D 4751.....	70 U.S. sieve
Permitivity	ASTM D 4491.....	2.0 sec -1
Flow rate.....	ASTM D 4491.....	140 gpm./ft ²
UV resistance	ASTM D 4355.....	70% (500 hrs.)

Dimensions: 165' x 12" x 1"

Weight: 65 lbs.